


Technical Data Sheet

Greeno Series

X=Color Code



- **TYPE-C+USB** (5V 2100mA)
- Supplied with **rockers**, support and mounting claws and Frame.
- To be used **ONLY** with **Greeno** one gang or multi-gang frames
- Mounting with claws or/and screws.

1. Basic Information

Description	Item Code	Terminal Type
TYPE-C+USB (5V 2100mA)	G3-132	Screw

2. Technical Characteristics


Rated Electricity:	Input: 110V~250V~ 50-60Hz 0.3A Output: (A+C) 5V=2.1A
IP:	20
Material:	Mechanism Housing: PC Rocker: PC Claw: Steel Support: Q195 Halogen free
Color & Finishing:	Support & Mechanism Housing: Light gray/Rocker: (Optional color) W-White B-Black MW-Matte white MB- Matte black G -Grey
Mounting Type:	Flush mounting
Terminal Capacity:	1~2.5 mm ² Rigid
Standard:	IEC 62368-1
Self-Extinguishing:	850°C/30s for the parts holding live parts in place 650°C/30s for other parts
Dielectric Strength:	2000V
ALT:	≤2000m
Ambient Temperature for Storage:	-20 °C ~ 50 °C
Ambient Temperature for Operation:	-15 °C ~ 45 °C
Humidity for Storage	0%- 95%RH

Certificate:



4. Dimension

(mm)

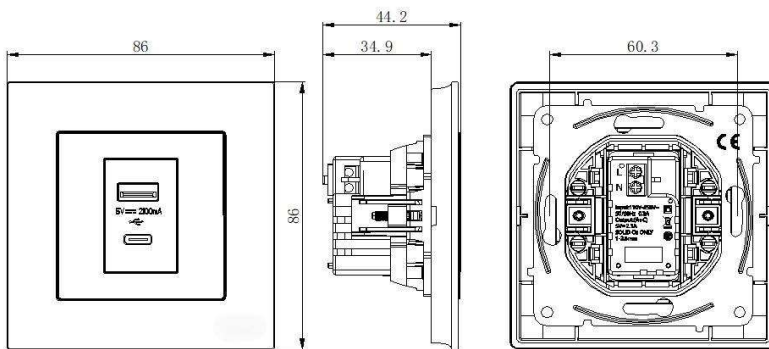

5. Wiring Scheme

