

# Technical Data Sheet

## Greeno Series

X=Color Code



- **Double Russian** socket
- Supplied with **rockers**, support and mounting claws and Frame.
- Mounting with claws or/and screws.

### 1. Basic Information

| Description                  | Item Code | Terminal Type |
|------------------------------|-----------|---------------|
| <b>Double Russian</b> socket | G3-130    | <b>Screw</b>  |

### 2. Technical Characteristics


|                                    |                                                                                                                                      |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Rated Electricity:                 | 250V~ 16A 50/60Hz                                                                                                                    |
| IP:                                | 20                                                                                                                                   |
| Material:                          | Mechanism Housing: PP<br>Rocker: PC<br>Claw: Steel Support: Q195<br>Halogen free                                                     |
| Color & Finishing:                 | Support & Mechanism Housing: <b>Light gray/Rocker: (Optional color)</b><br>W-White B-Black MW-Matte white MB- Matte black<br>G -Grey |
| Mounting Type:                     | Flush mounting                                                                                                                       |
| Wire Stripping Length:             | 12 mm                                                                                                                                |
| Terminal Capacity:                 | 1.5~4 mm <sup>2</sup> Rigid/Flexible                                                                                                 |
| Standard:                          | IEC 60884-1                                                                                                                          |
| Self-Extinguishing:                | 850°C/30s for the parts holding live parts in place 650°C/30s for other parts                                                        |
| Dielectric Strength:               | 2000V                                                                                                                                |
| Ambient Temperature for Storage:   | -20 °C ~ 50 °C                                                                                                                       |
| Ambient Temperature for Operation: | -15 °C ~ 45 °C                                                                                                                       |
| Humidity for Storage               | 0%- 95%RH                                                                                                                            |

Certificate:



### 4. Dimension

(mm)

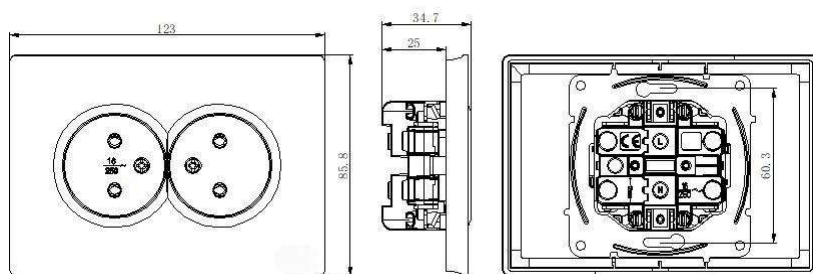

### 5. Wiring Scheme

