

Technical Data Sheet

Greeno Series


X=Color Code




- **1 gang German** socket (with protective door) (with USB+Type-C)
- Supplied with **rockers**, support and mounting claws and Frame.
- To be used **ONLY** with one gang or multi-gang frames
- Mounting with claws or/and screws.

4. Dimension

(mm)

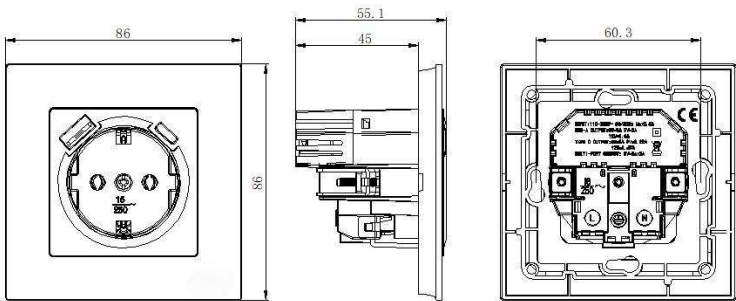

5. Wiring Scheme

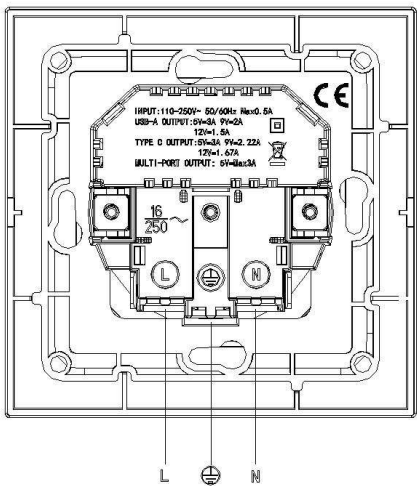

1. Basic Information

Description	Item Code	Terminal Type
1 gang German socket (with protective door) (with USB+Type-C)	G3-121-A+C	Screw

2. Technical Characteristics

Rated Electricity:	250V~ 16A Input: 110-250V~ 50/60Hz Max 0.5A USB-A Output: 5V=3A 9V=2A 12V=1.5A Type C Output : 5V=3A 9V=2.22A 12=1.67A Multi-port Output:5V=Max3A
IP:	20
Material:	Mechanism Housing: PC Rocker: PC Claw: Steel Support: Q195 Halogen free
Color & Finishing:	Support & Mechanism Housing: Light gray/Rocker: (Optional color) W-White B-Black MW-Matte white MB- Matte black G -Grey
Mounting Type:	Flush mounting
Wire Stripping Length:	12 mm
Terminal Capacity:	1.5~4 mm2 Rigid/Flexible
Standard:	IEC 60884-1 IEC 62368-1
Self-Extinguishing:	850°C/30s for the parts holding live parts in place 650°C/30s for other parts
Dielectric Strength:	2000V
ALT:	≤2000m
Ambient Temperature for Storage:	-20 °C ~ 50 °C
Ambient Temperature for Operation:	-15 °C ~ 45 °C
Humidity for Storage	0%- 95%RH

Certificate:

